


Technical Details

- Dimensions: 264 x 98 x 34.2mm
- Ports: G1/4"

Box Contents

- 1 x Thermal paste
- 6 x 1mm thermal pad
- 7 x 0.5m thermal pad
- 10 x M2.5 x 6mm screw
- 10 x Red washer
- 2 x RGB LED
- 1 x RGB controller
- 2 x RGB needle connector

G1/4" hose fittings sold separately

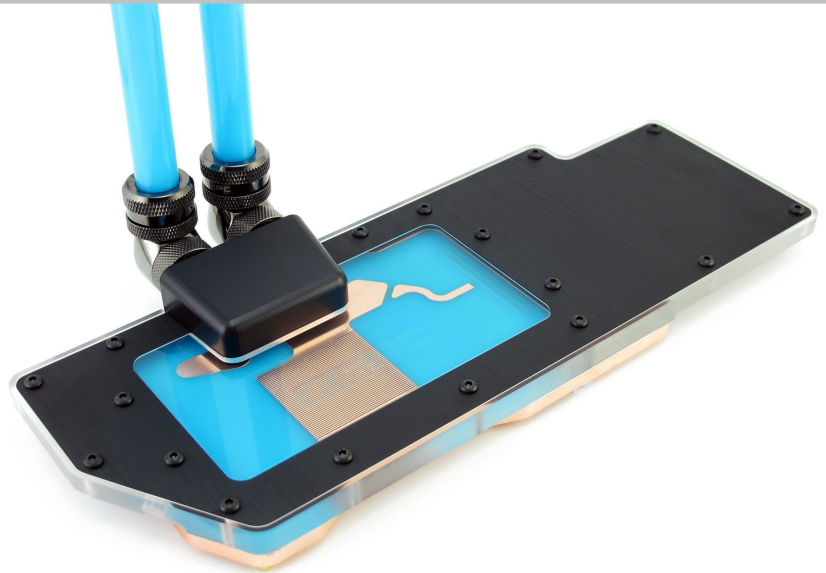

Note: This waterblock is only suitable for reference design RX Vega cards. If you are unsure if your card is a reference design card, contact us prior to installation to make sure.



1. Check your box contents against the list above before you start the installation process. Now remove the protective plastic film from the block.



2. The waterblock is designed for use with rotary fittings. Attach your chosen fittings to the inlet and outlet of the block. The water flow can go in either direction.




3. The block is now ready to be connected to the other watercooling components for leak testing.

NEXT PAGE →


In the next steps the waterblock is shown without tubing or other watercooling components connected. This has been done to make it easier to see the installation process.

Before handing the card you should take precautions to avoid static damage.

Razor RGB- RX Vega - Steps 4 - 10

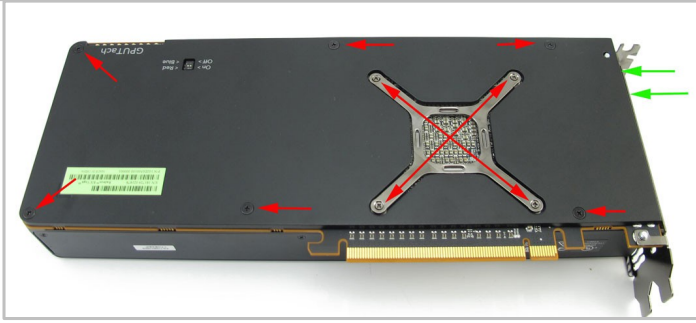


4. Turn the card on its back and remove the 12 screws highlighted above.

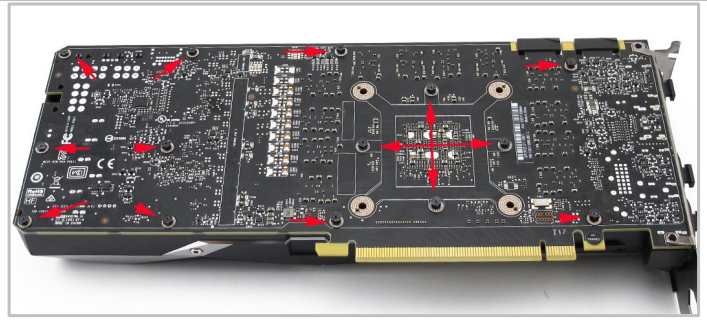


5. Remove the backplate and remove the 14 screws highlighted above.




6. Turn the card back over and carefully remove the heat sink and fan. Now the card and heat sink are separated detach the fan power cable from the fan header.

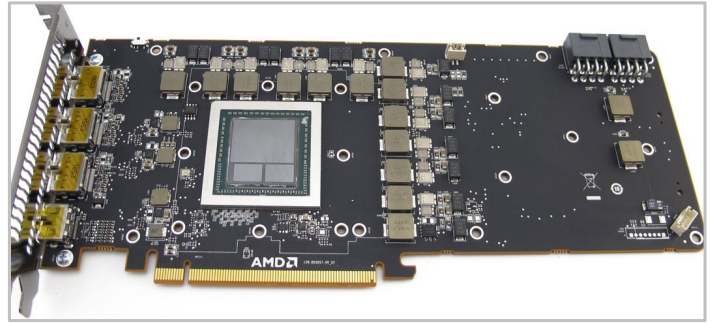


7. Clean the thermal paste from the GPU core and remove any residue left from the thermal pads. **Do not attempt to clean any paste left between the core and memory stacks, as this can cause damage.**

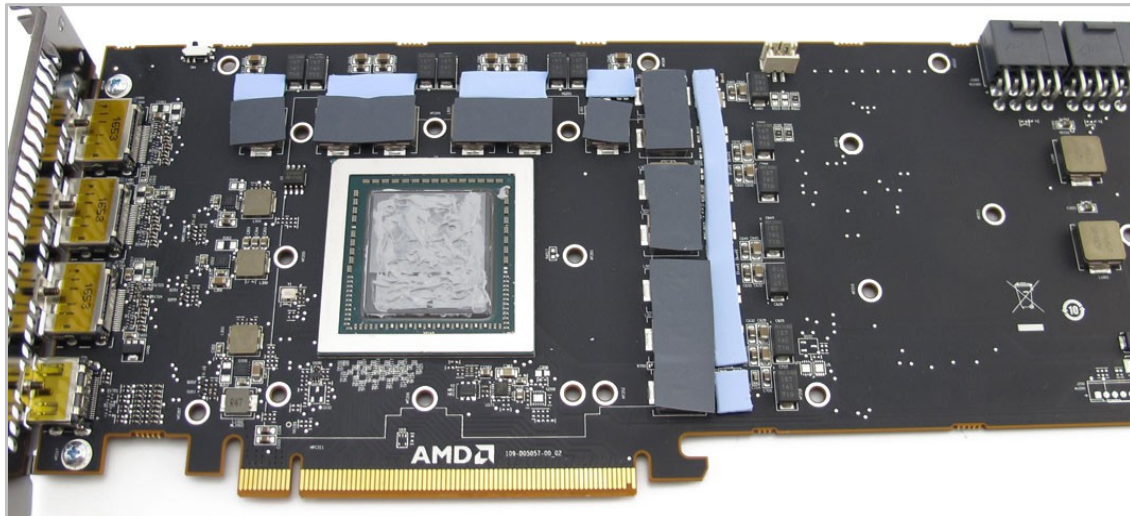

8. Remove the tape from both sides of the thermal pads. Place the blue and grey pads on the thirteen positions shown above and apply thermal paste to the GPU core/memory stacks. Place the waterblock on the card to line up the screw holes and then flip it over (make sure the thermal pads stay in place).

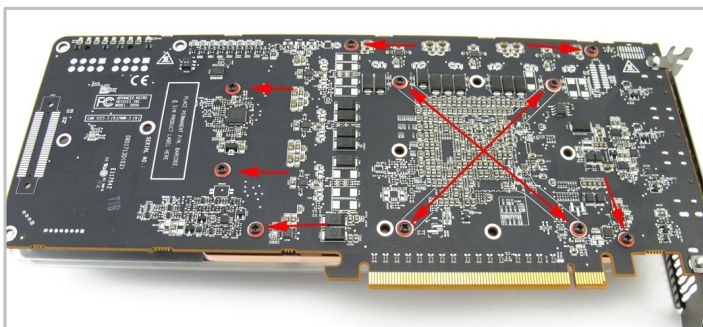

9. Now fit the supplied screws and washers in positions marked red. You should gradually tighten each screw to apply even pressure.

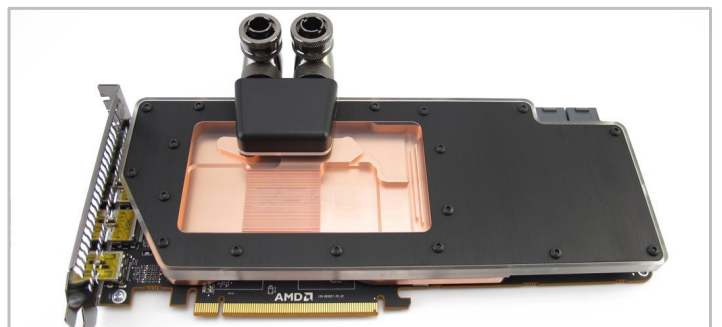

10. Do not over tighten the screws as this may bend the card and cause permanent damage. The card is now ready for use. When you first boot it is advisable to use software to check the core temperature. If the temperature is high you will need to remount the block.